



THE TRUCK THAT CARRIES MORE

ecomet **1214** BS III



- 10 T payload*
- 9.00 x 20 Tyres
- 7'5" load body width
- Day cabin option with 19 ft HSD body

Expect much more from the all-new ecomet 1214. Designed and engineered to carry more load over longer distances, the ecomet 1214



The ECOMET Advantage

- Powered by the fuel efficient 'H' Series engine
- 120 HP with 392 Nm torque
- Higher axle capacities wide & spacious cabin
- Better drive line with 6 speed OD & 60SHO Drive head

Applications

- Market load (Rated)
- Auto parts
- Interstate parcel / logistics
- LPG cylinders


Specifications

Engine	'H' series 4 cylinder turbo charged intercooled
Maximum power	120 HP @ 2400 rpm
Maximum torque	392 Nm @ 1600 rpm
Clutch	330 mm Dia single plate dry type-Hydraulic actuation
Gear box	Synchromesh 6S ODGB with FGR 8.28:1
Max speed in top gear	95 kmph
Gradeability	21 %
Steering	Power steering
Frame	All steel ladder type with bolted construction
Front axle	I Section Reverse Elliot
Rear axle	Fully Floating 60SHO 5.57:1 RAR
Suspension	Shackle ended
Cabin	All Steel factory built tiltable day cabin
Brakes	Full air - dual line S-cam brakes
Parking brakes	Spring actuated, Pneumatic (on Rear only)
Battery	12 V-100 AH
Tyres	9.00 x 20 - 16PR Radial Option
GVW	15500 kgs
Payload	10004 kgs


Major Dimensions (in mm)

Wheel base	4200 - Day
Front overhang	1338
Rear overhang	2125
Overall length	7663
Overall width	2307
Front track	1964
Rear track	1816
Min. ground clearance	232
Turning circle dia	14500
Load body length	19 ft
Load body internal width	7'6"

BODY OPTIONS

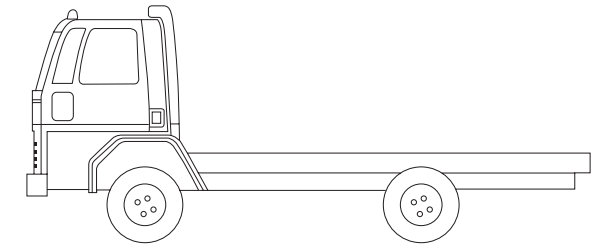

Cab Chassis

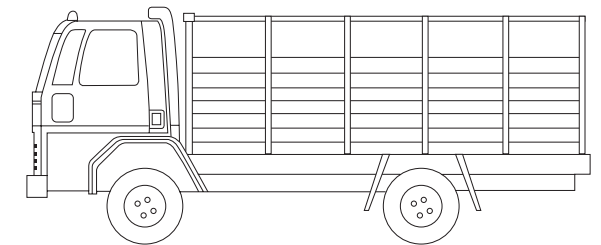

FSD & HSD

Authorized Dealer

